



电机外形图 Motor outline drawing

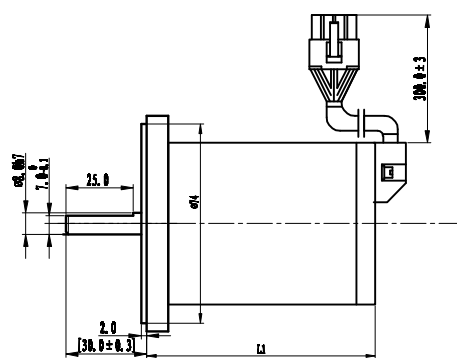

BLDC06FA L1=85mm

BLDC06FB L1=95mm

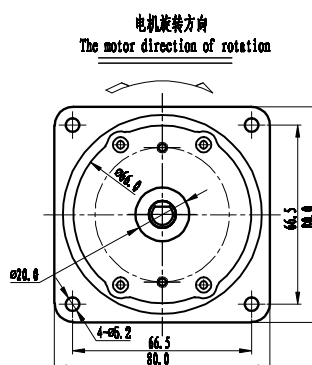

电机性能参数 Motor performance parameters

型号 Model	电压 Voltage (V)	输出功率 Output Power (W)	空载参数No-load Parameters		负载参数Load Parameters			电机寿命 Brush Life (h)	电机重量 Motor Weight (kg)
			转速Speed (r/min)	电流Current (A)	转速Speed (r/min)	电流Current (A)	力矩Torque (N.m)		
BLDC-06FA-24-3000	24	30	3000	0.6Max	2200	1.4	0.08	>5000	0.6
BLDC-06FA-36-3000	36	30	3000	0.4Max	2300	0.93	0.08	>5000	0.6
BLDC-06FA-48-3000	48	30	3000	0.26Max	2400	0.62	0.08	>5000	0.6
BLDC-06FA-220-3000	220	30	3000	0.12Max	2500	0.34	0.08	>5000	0.6
BLDC-06FB-24-1800	24	50	3000	0.7Max	2200	2.1	0.15	>5000	0.8
BLDC-06FB-36-3000	36	50	3000	0.45Max	2300	1.34	0.15	>5000	0.8
BLDC-06FB-48-1800	48	50	3000	0.31Max	2400	0.93	0.15	>5000	0.8
BLDC-06FB-220-3000	220	50	3000	0.15Max	2500	0.5	0.15	>5000	0.8


可根据客户要求定做电机电压3V-220V电机,电机转速1000-3000RPM

电机接线图 Wiring diagram of motor




piughole	1	2	3	4
signal wire	U	W	Bv	Hn
piughole	5	6	7	8
signal wire	V	GND	Hw	Voc

电机出轴类型 Motor shaft type

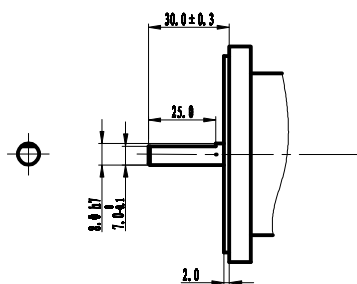


铣扁型 (GB) Milling flat

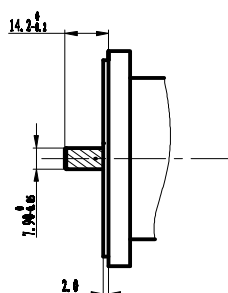

斜齿型 (GN) Helical tooth

适配減速器 Adaptive speed reducer



4GN3-15K L-32

4GN18-300K L=43

