
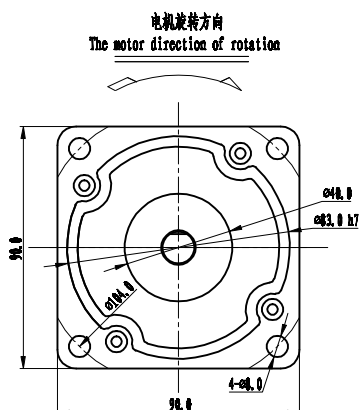


电机外形图 Motor outline drawing

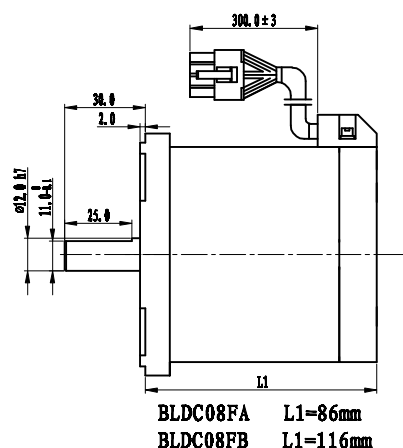

电机性能参数 Motor performance parameters

型号 Model	电压 Voltage (V)	输出功率 Output Power (W)	空载参数 No-load Parameters		负载参数 Load Parameters			电机寿命 Brush Life (h)	电机重量 Motor Weight (KG)
			转速 Speed (r/min)	电流 Current (A)	转速 Speed (r/min)	电流 Current (A)	转矩 Torque (N.m)		
BLDC-08FA-24-3000	24	150	3000	0.8Max	2200	10.5	0.65	>5000	1.6
BLDC-08FA-36-3000	36	150	3000	0.65Max	2300	6	0.65	>5000	1.6
BLDC-08FA-48-3000	48	150	3000	0.45Max	2400	4.3	0.65	>5000	1.6
BLDC-08FA-220-3000	220	150	3000	0.3Max	2500	0.48	0.65	>5000	1.6
BLDC-08FB-24-1800	24	200	3000	0.75Max	2200	9.5	0.88	>5000	2.6
BLDC-08FB-36-3000	36	200	3000	0.6Max	2300	6.3	0.88	>5000	2.6
BLDC-08FB-48-1800	48	200	3000	0.4Max	2400	4.1	0.88	>5000	2.6
BLDC-08FB-220-3000	220	200	3000	0.3Max	2500	0.7	0.88	>5000	2.6


可根据客户要求定制电机电压3V-220V电机, 电机转速1000-3000RPM

接线插孔对应信号说明接线图 Corresponding signal connection socket wiring diagram




pinhole	1	2	3	4
signal wire	U	V	W	Bu
pinhole	5	6	7	8
signal wire	V	GND	Bw	Voc


电机出轴类型 Motor shaft type

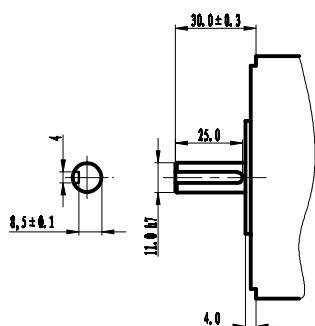


键槽型 (GA) Type keyway

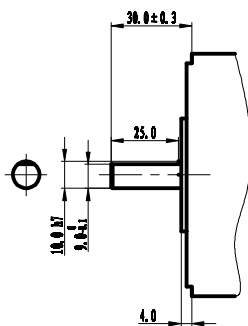

铣扁型 (GB) Milling flat

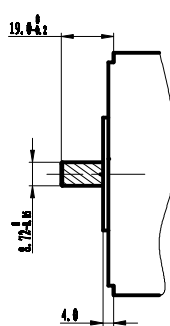


斜齿型 (GC) Helical tooth

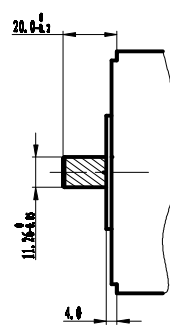

斜齿型 (GD) Helical tooth

适配减速器 Adaptive speed reducer

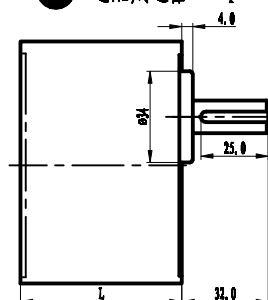

SGH3-18K L=45
SGH20-500K L=60

